

# Digital Electric Fence Voltmeter



## Instructions.

### To test energiser.

Disconnect wires from energiser & connect volt meter clips / hang plate to energiser terminals switch energiser on to test.


### To test fence line.

Connect the volt meters earth clip to the earth ( dead ) wire, or to the ground ( soil ) - then place the steel hang bracket at the top rear of the volt meter case, to the live ( hot ) wire - the volt meter will automatically turn on and display the fence voltage.

The digital volt meter operates from an internal 9 volt battery

- battery life is approx 1 year. Designed to be used for electric fences only.

### Fault Finding start

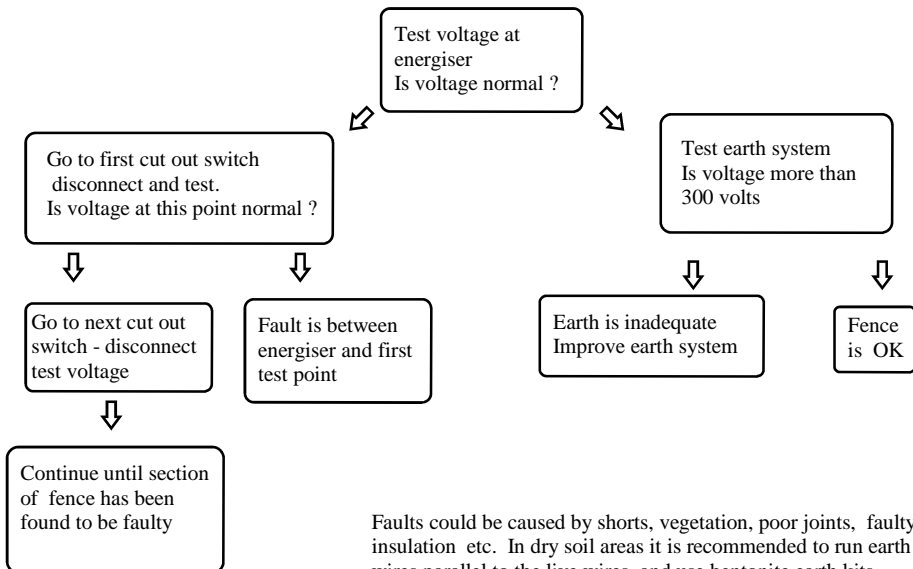

Faults could be caused by shorts, vegetation, poor joints, faulty insulation etc. In dry soil areas it is recommended to run earth wires parallel to the live wires, and use bentonite earth kits.